
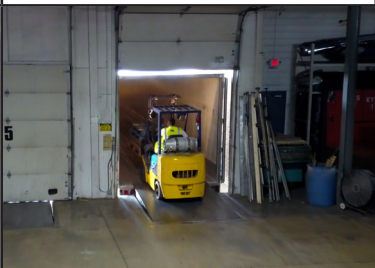
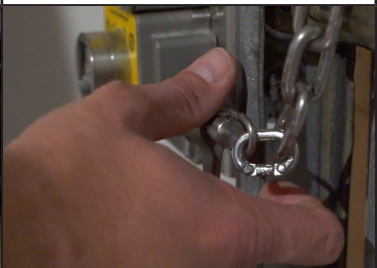



<p>Step 1 Obtain the red Salvo Gladhand (SGL) with the key code pertaining to the correct loading dock number. Note: The key code on the gladhand needs to match the Salvo Manual Door Lock.</p>	<p>Step 2 Remove the RED air line from semi trailer.</p>	<p>Step 3 Apply the gladhand by vertically inserting the head of the SGL into the coupling. Push forward and squeeze the two buttons on the sleeve of the gladhand to engage.</p>	<p>Step 4 While pushing the SGL towards the coupling and pressing the buttons on the sleeve, turn the key counter-clockwise to remove the key from the gladhand.</p>
			
<p>Step 5 Insert the key in the Salvo Manual Door Lock, located on the interior of the dock door, and turn clockwise. Bolt can now be turned and removed from lock.</p>	<p>Step 6 Loading/unloading can take place.</p>	<p>Step 7 When loading/ unloading is complete, close the dock door, re-insert bolt into the Salvo Manual Door Lock and turn. The key can now be turned counter-clockwise and removed.</p>	<p>Step 8 Insert the key into the gladhand and turn the key clockwise to remove the gladhand from the coupling.</p>
 <p>Step 9 Return the gladhand to its original place and depart from the dock.</p>			